



DELTA CEILING LIGHT

FEATURES

- Ultra-slim design
- The lamp body is made of PC, the diffuser is made of PS.
- 38 MM ultra-thin lamp body design, it can realize quick connection and quick installation.
- External drive, easy to change.

SPECIFICATIONS

Luminaire for mounting on walls and ceiling, and for pendant mounting

Diameter diffuser: Ø300*38mm; Ø400*38mm; Ø500*38mm

Colour temperature can be adjustable

TECHNICAL DATA

System power	18W; 24W; 40W
Luminous flux of luminaire	1440LM; 1920LM; 3200LM
Colour temperature	3000/4000/5000K
Colour Rendering index[CRI]	RA≥80
Ingress protection	IP40


APPLICATION AREAS

Office & Education:

Classrooms, meeting rooms, offices, reception rooms, cafeterias, entrance areas, corridors, stairwells

Retail & Hospitality:


Hotels, reception areas, corridors, circulation zones, sales rooms, shopping malls, restaurants, nursing homes, lobbies

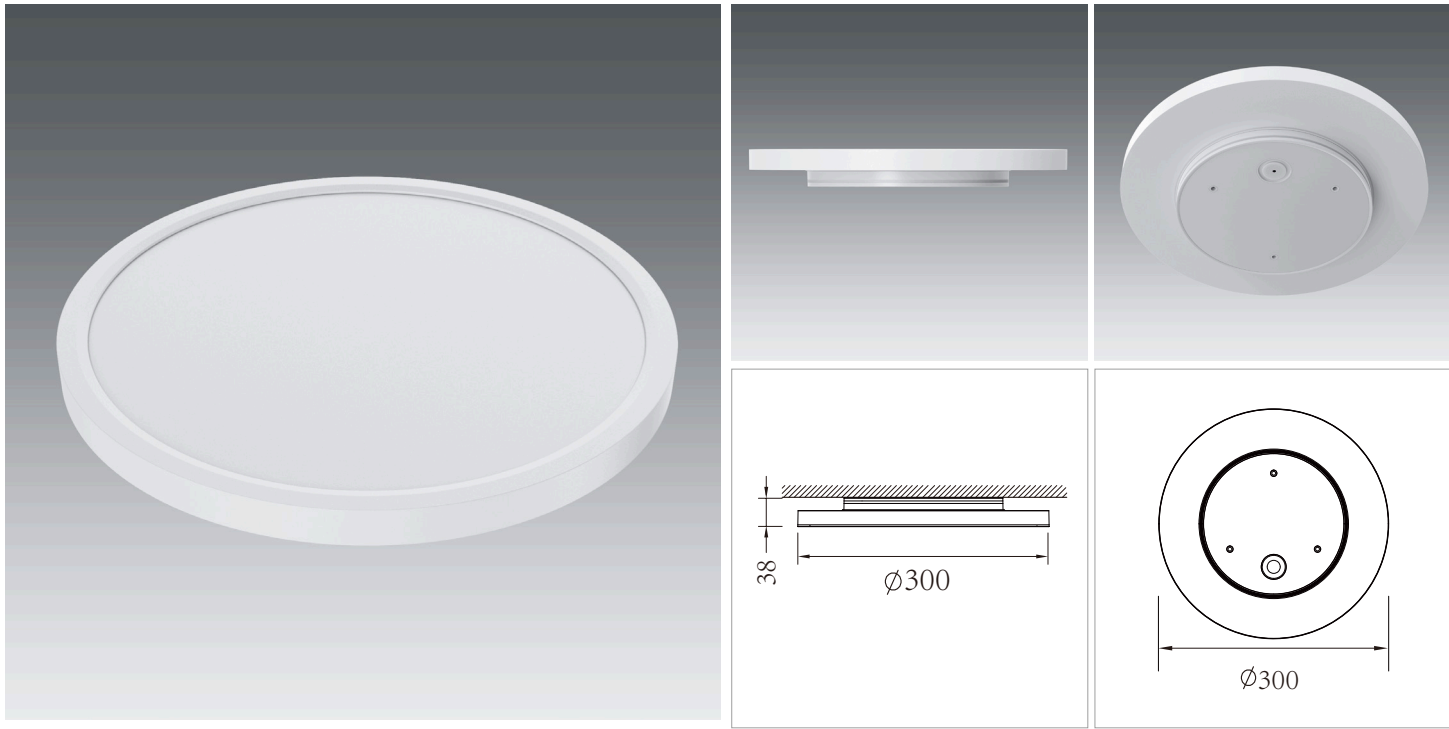

Item NO.	Dimension [MM]	Voltage [V]	Power [W]	Luminous flux of luminaire[LM]	CCT3 [K]	CRI	DF	Warranty [Years]	IP	Certificate	Feame Color	OPTIONS
GW-CLDY1-018-G3-Y	Ø300*38	220-240	18	1440	4000	>80	>0.7	3	40	CE/ROHS/ERP	White	CCT1
GW-CLDY1-018-G3-Y	Ø300*38	220-240	18	1440	3000/4000/5000	>80	>0.7	3	40	CE/ROHS/ERP	White	Three-speed power adjustable/CCT 3
GW-CLDY1-024-G3-Y	Ø400*38	220-240	24	1920	4000	>80	>0.9	3	40	CE/ROHS/ERP	White	CCT1
GW-CLDY1-024-G3-Y	Ø400*38	220-240	24	1920	3000/4000/5000	>80	>0.9	3	40	CE/ROHS/ERP	White	Three-speed power adjustable/CCT 3
GW-CLDY1-040-G3-Y	Ø500*38	220-240	40	3200	4000	>80	>0.9	3	40	CE/ROHS/ERP	White	CCT1
GW-CLDY1-040-G3-Y	Ø500*38	220-240	40	3200	3000/4000/5000	>80	>0.9	3	40	CE/ROHS/ERP	White	Three-speed power adjustable/CCT 3


MOUNTING PROCEDURE

1

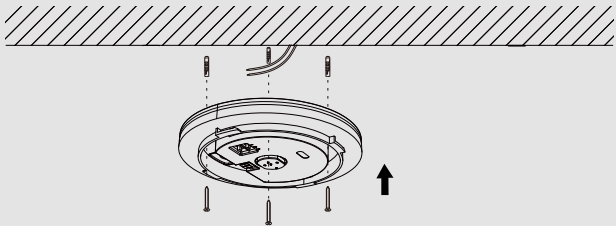

Fix light bracket with screw and plastic anchor into the ceiling,make sure the bracket is firmly installed

2

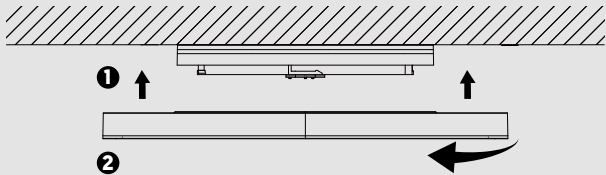

The chassis pivots to the bracket,then fasten it