



HARBOUR CEILING LIGHT

FEATURES

- Ultra-thin design,LED wall/ceiling luminaire
- Stand out in terms of shape ensure that the light is nice and evenly spread.
- Six sizes of lamp for your choose.
- Economical light

SPECIFICATIONS

Luminaire for mounting on walls and ceiling,and for pendant mounting

Diameter diffuser: Ø230*25mm; Ø300*25mm; Ø400*25mm; Ø500*25mm; Ø600*25mm; Ø750*25mm

Colour temperature can be adjustable

TECHNICAL DATA

System power	18W; 24W; 32W; 40W; 50W; 80W
Luminous flux of luminaire	1800LM; 2400LM; 3200LM; 4000LM; 5000LM; 7000LM
Colour temperature	3000/4000/5000K
Colour Rendering index(CRI)	RA≥80
Ingress protection	IP40


APPLICATION AREAS

Office & Education

classrooms, meeting rooms, offices, reception rooms, cafeterias, foyers and lobbies, corridors

Retail & Hospitality

hotels, reception areas, circulation zones

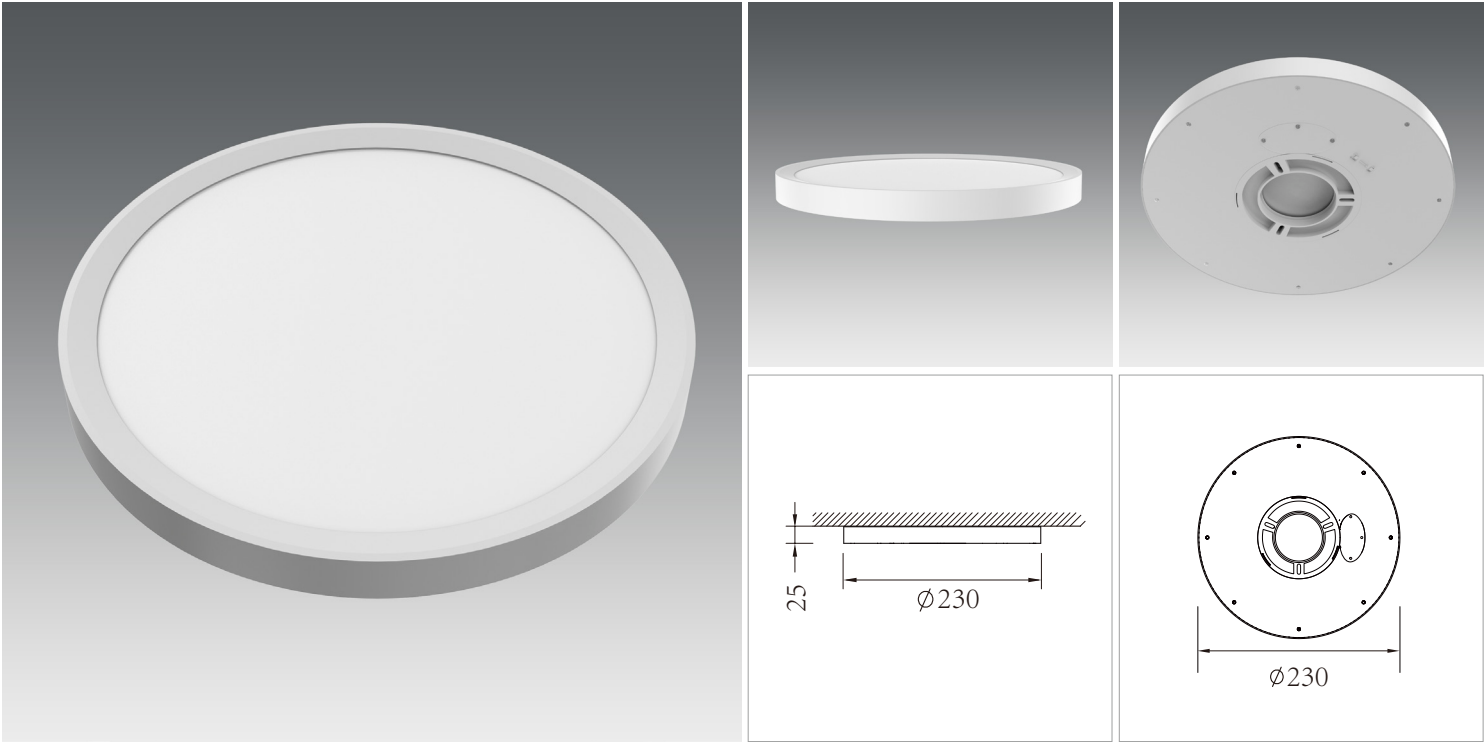

Item NO.	Dimension (MM)	Voltage (V)	Power (W)	Luminous flux of luminaire(LM)	CCT (K)	CRI	DF	Warranty (Years)	IP	Certificate	Feame Color	OPTIONS
GW-CLHY1-018-G1-Y	Ø230*25	220-240V	18	1440	3000/4000/5000	>80	>0.7	2	40	CE/ROHS/ERP	White	CCT3
GW-CLHY1-024-G1-Y	Ø300*25	220-240V	24	1920	3000/4000/5000	>80	>0.7	2	40	CE/ROHS/ERP	White	CCT3
GW-CLHY1-032-G1-Y	Ø400*25	220-240V	32	2560	3000/4000/5000	>80	>0.9	2	40	CE/ROHS/ERP	White	CCT3
GW-CLHY1-040-G1-Y	Ø500*25	220-240V	40	3200	3000/4000/5000	>80	>0.9	2	40	CE/ROHS/ERP	White	CCT3
GW-CLHY1-050-G1-Y	Ø600*25	220-240V	50	4000	3000/4000/5000	>80	>0.9	2	40	CE/ROHS/ERP	White	CCT3
GW-CLHY1-070-G1-Y	Ø750*25	220-240V	70	5600	3000/4000/5000	>80	>0.9	2	40	CE/ROHS/ERP	White	CCT3

MOUNTING PROCEDURE

1

Fix light bracket with screw and plastic anchor into the ceiling,make sure the bracket is firmly installed

2

The chassis pivots to the bracket,then fasten it