



GRACE CEILING LIGHT

FEATURES

- Front/back side are both IP44
- Simplistic modern design and look with comfortable lighting
- The chassis is made of PP with heightened hanging plate
- Easy to install
- Economical light

SPECIFICATIONS

Luminaire for mounting on walls and ceiling, and for pendant mounting

Diameter diffuser: Ø230*64mm; Ø270*64mm; Ø370*68mm; Ø470*68mm

Colour temperature can be adjustable

TECHNICAL DATA

System power	18W; 24W; 32W; 40W
Luminous flux of luminaire	1800LM; 2400LM; 3200LM; 4000LM
Colour temperature	4000K
Colour Rendering index(CRI)	RA ≥ 80
Ingress protection	IP44


APPLICATION AREAS

Office & Education

corridors, basements, staircases

Retail & Hospitality

storage rooms, corridors, exhibition spaces

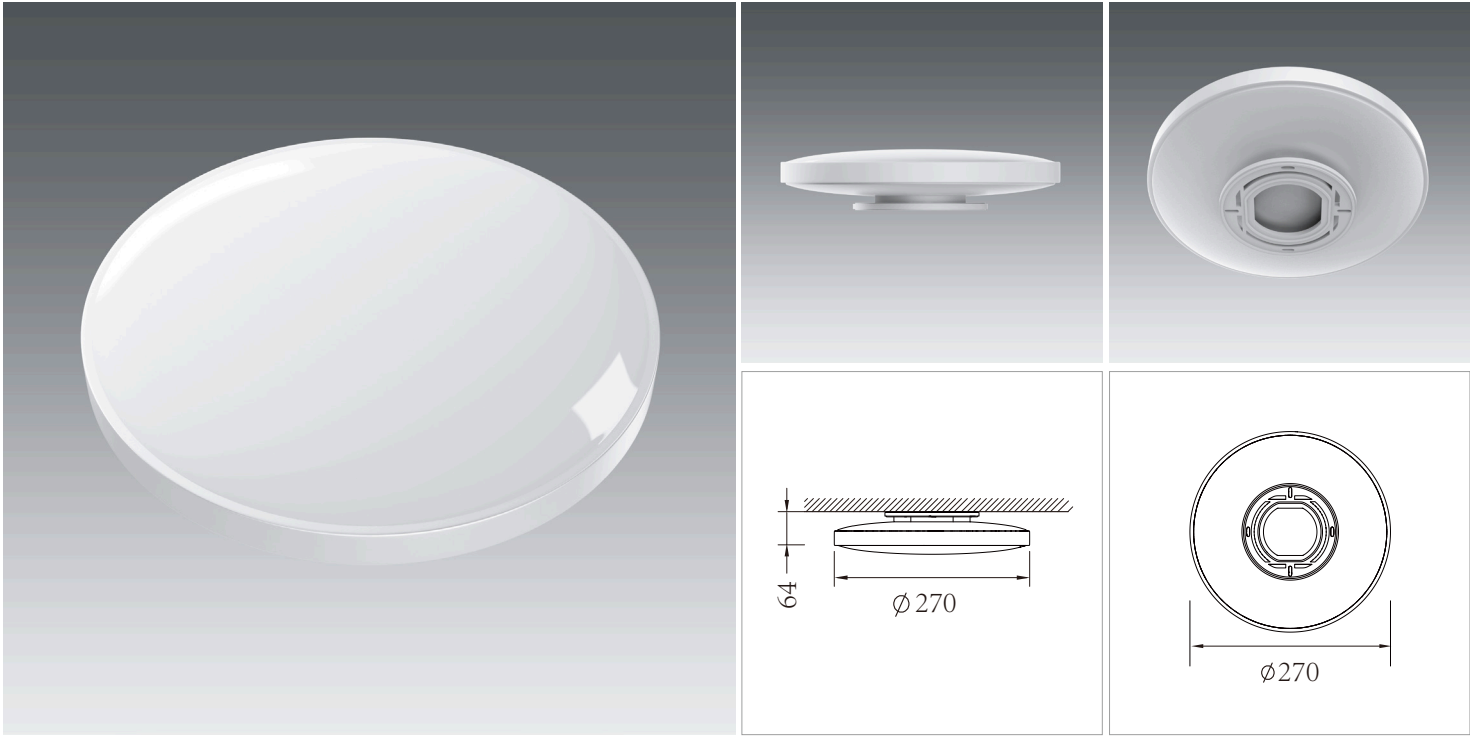

Item NO.	Dimension (MM)	Voltage (V)	Power (W)	Luminous flux of luminaire(LM)	CCT (K)	CRI	DF	Warranty (Years)	IP	Certificate	Feame Color
GW-CLGY1-018-G1-Y	Ø 230*64	220-240	18	1440	4000	>80	>0.7	2	44	CE/ROHS/ERP	White
GW-CLGY1-024-G1-Y	Ø 270*64	220-240	24	1920	4000	>80	>0.7	2	44	CE/ROHS/ERP	White
GW-CLGY1-032-G1-Y	Ø 370*68	220-240	32	2560	4000	>80	>0.9	2	44	CE/ROHS/ERP	White
GW-CLGY1-040-G1-Y	Ø 470*82	220-240	40	3200	4000	>80	>0.9	2	44	CE/ROHS/ERP	White

MOUNTING PROCEDURE

