



CANDY CEILING LIGHT

FEATURES

- Minimalist style of design, Ultra-thin frameless
- The chassis is made of iron, the frame is made of aluminum profile, the diffuser is made of PMMA/PS.
- Quick installation.
- Size can be customized.

SPECIFICATIONS


Luminaire for mounting on walls and ceiling, and for pendant mounting
 Diameter diffuser: Ø300*55mm; Ø400*55mm; Ø500*55; Ø600*55mm;
 Ø800*55mm; Ø1000*55mm
 Colour temperature can be adjustable

TECHNICAL DATA

System power	18W; 24W; 40W; 60W; 80W
Luminous flux of luminaire	1800LM; 2400LM; 4000LM; 6000LM; 8000LM
Colour temperature	3000/4000/5000K
Colour Rendering index(CRI)	CRI ≥ 80
Ingress protection	IP40

APPLICATION AREAS

Office & Education
 corridors, basements, staircases, wet rooms
 Retail & Hospitality
 storage rooms, corridors, lockers, garages

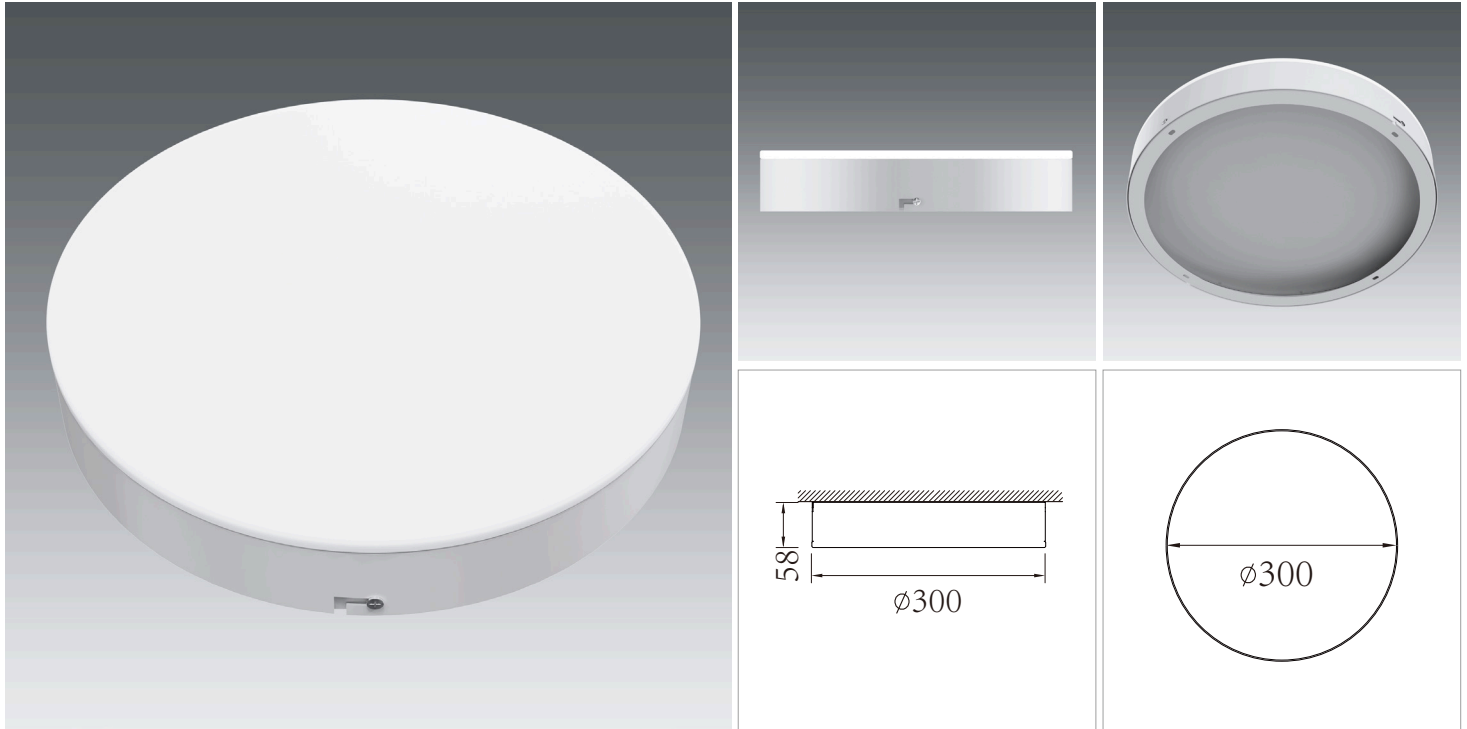

Item NO.	Dimension (MM)	Voltage (V)	Power (W)	Luminous flux of luminaire(LM)	CCT (K)	CRI	DF	Warranty (Years)	IP	Certificate	Feame Color	White/ Starry Sky
GW-CLC1-001-G1	∅300*55	220-240	18	1800	3000/4000/5000	>80	>0.7	5	40	CE/ROHS/ERP	Black/White/Wood optics	Dual Power/CCT3/Dali/Scr/2.4G/TRIAC Dimmable
GW-CLC1-001-G1	∅400*55	220-240	24	2400	3000/4000/5000	>80	>0.9	5	40	CE/ROHS/ERP	Black/White/Wood optics	Dual Power/CCT3/Dali/Scr/2.4G/TRIAC Dimmable
GW-CLC1-001-G1	∅500*55	220-240	40	4000	3000/4000/5000	>80	>0.9	5	40	CE/ROHS/ERP	Black/White/Wood optics	Dual Power/CCT3/Dali/Scr/2.4G/TRIAC Dimmable
GW-CLC1-001-G1	∅600*55	220-240	50	6000	3000/4000/5000	>80	>0.9	5	40	CE/ROHS/ERP	Black/White/Wood optics	Dual Power/CCT3/Dali/Scr/2.4G/TRIAC Dimmable
GW-CLC1-001-G1	∅800*55	220-240	60	8000	3000/4000/5000	>80	>0.9	5	40	CE/ROHS/ERP	Black/White/Wood optics	Dual Power/CCT3/Dali/Scr/2.4G/TRIAC Dimmable
GW-CLC1-001-G1	∅1000*55	220-240	80	10000	3000/4000/5000	>80	>0.9	5	40	CE/ROHS/ERP	Black/White/Wood optics	Dual Power/CCT3/Dali/Scr/2.4G/TRIAC Dimmable

MOUNTING PROCEDURE

