



# GNOME FRAMELESS LIGHT

## FEATURES

- Minimalist style of design.
- Ultra-thin frameless design, achieve five-sided luminous super-large luminous surface.
- The chassis is made of iron, the frame is made of aluminum profile, the diffuser is made of PMMA/PS.
- 48 MM ultra-thin lamp body design, it can realize quick connection and quick installation.

## SPECIFICATIONS



Luminaire for mounting on walls and ceiling, and for pendant mounting  
Diameter diffuser: 300\*300\*48mm, 300\*600\*48mm, 600\*600\*48mm, 300\*1200\*48mm  
Colour temperature can be adjustable

## TECHNICAL DATA

System power	18W, 24W, 40W
Luminous flux of luminaire	1800LM; 2400LM; 4000LM
Colour temperature	4000K
Colour Rendering index(CRI)	RA ≥ 80
Protection Class	II
Ingress protection	IP40

## APPLICATION AREAS

**Office&Education:** classroom, meeting room, offices, reception room, foyers and lobbies, corridors  
**Retail&Hospital:** Hotels, reception areas

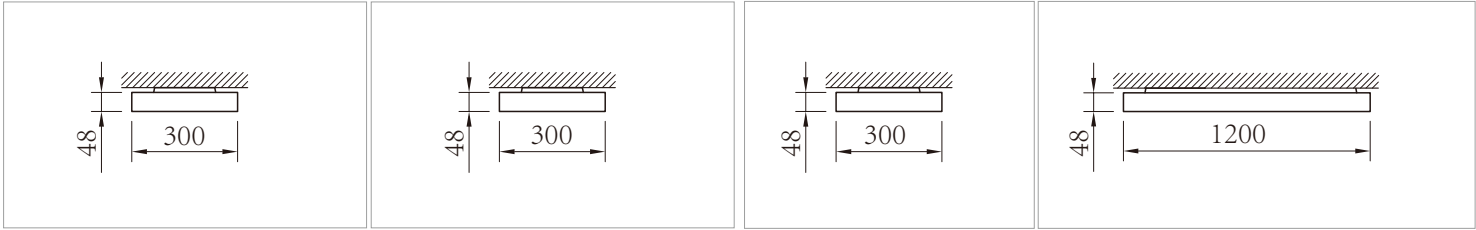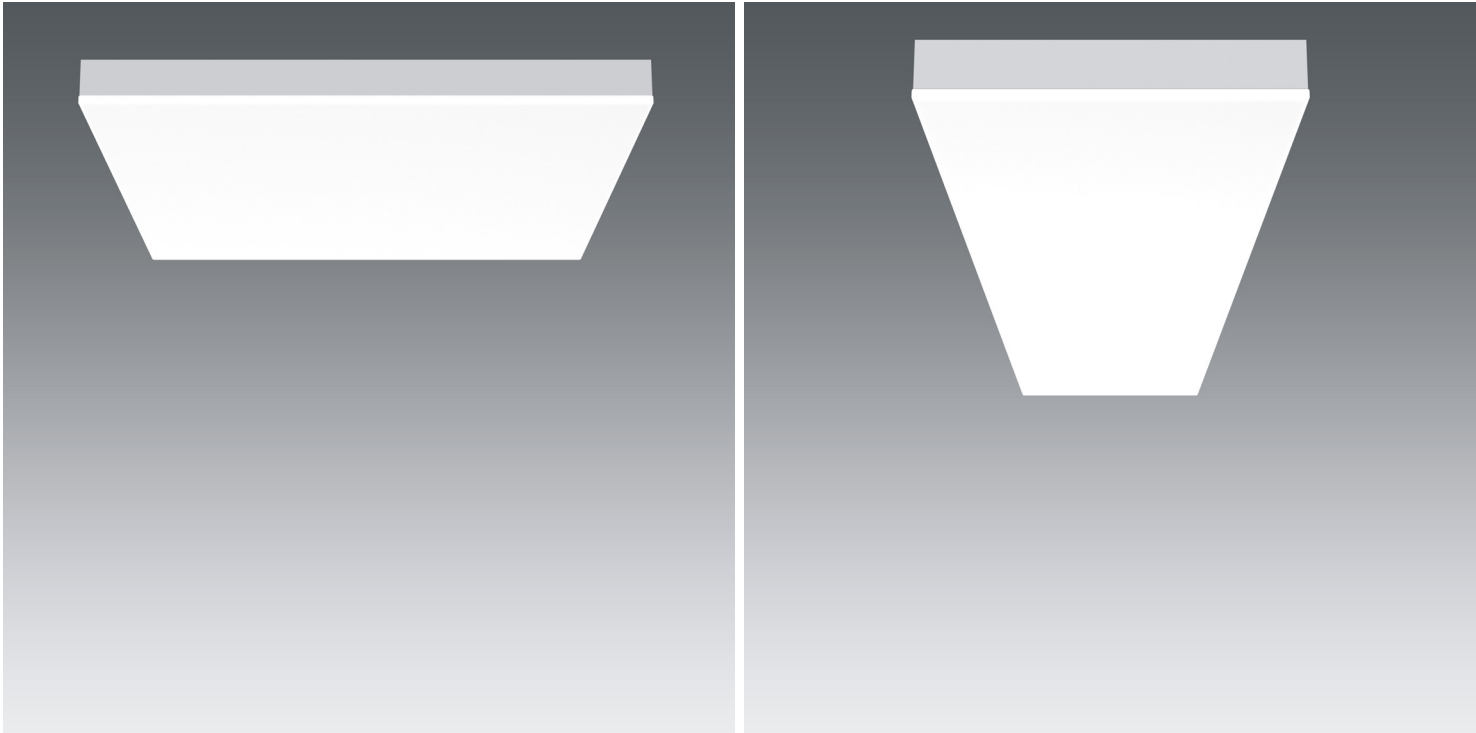

Item NO.	Dimension (MM)	Voltage (V)	Power (W)	Luminous flux of luminaire(LM)	CCT (K)	CRI	DF	Warranty (Years)	IP	Certificate	Frame Cover	White/Starry Sky
GW-CLB1-001-G1	300*300*48	220-240	18	1800	4000	>80	>0.7	5	40	CE/ROHS/ERP	Black/White	Dual Power/CCT3/ Dali/Scr/2.4G
GW-CLB1-002-G1	300*600*48	220-240	24	2400	4000	>80	>0.7	5	40	CE/ROHS/ERP	Black/White	Dual Power/CCT3/ Dali/Scr/2.4G
GW-CLB1-003-G1	600*600*48	220-240	40	4000	4000	>80	>0.9	5	40	CE/ROHS/ERP	Black/White	Dual Power/CCT3/ Dali/Scr/2.4G
GW-CLB1-004-G1	300*1200*48	220-240	40	4000	4000	>80	>0.9	5	40	CE/ROHS/ERP	Black/White	Dual Power/CCT3/ Dali/Scr/2.4G

## MOUNTING PROCEDURE

