



ELEVATE FRAMELESS LIGHT

FEATURES

- Minimalist style of design
- Ultra-thin frameless design, super-large luminous surface.
- The chassis is made of EVA film, the frame is made of aluminum profile, the diffuser is made of PMMA/PS.
- Quick installation.
- Size can be customized.

SPECIFICATIONS

Luminaire for mounting on walls and ceiling, and for pendant mounting

Diameter diffuser: 300*300*80mm; 300*600*80mm; 600*600*80;

Colour temperature can be adjustable

TECHNICAL DATA

System power	18W; 24W; 40W
Luminous flux of luminaire	1800LM; 2400LM; 4000LM
Colour temperature	3000/4000/5000K
Colour Rendering index(CRI)	CRI ≥ 80
Ingress protection	IP40



APPLICATION AREAS

Office & Education

open-plan offices, individual offices, meeting rooms, foyers and lobbies, cafeterias

Retail & Hospitality

reception areas, circulation zones, Checkout areas

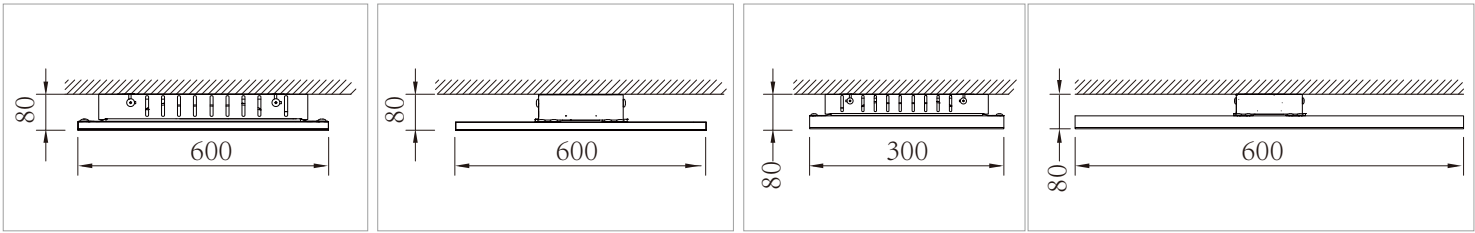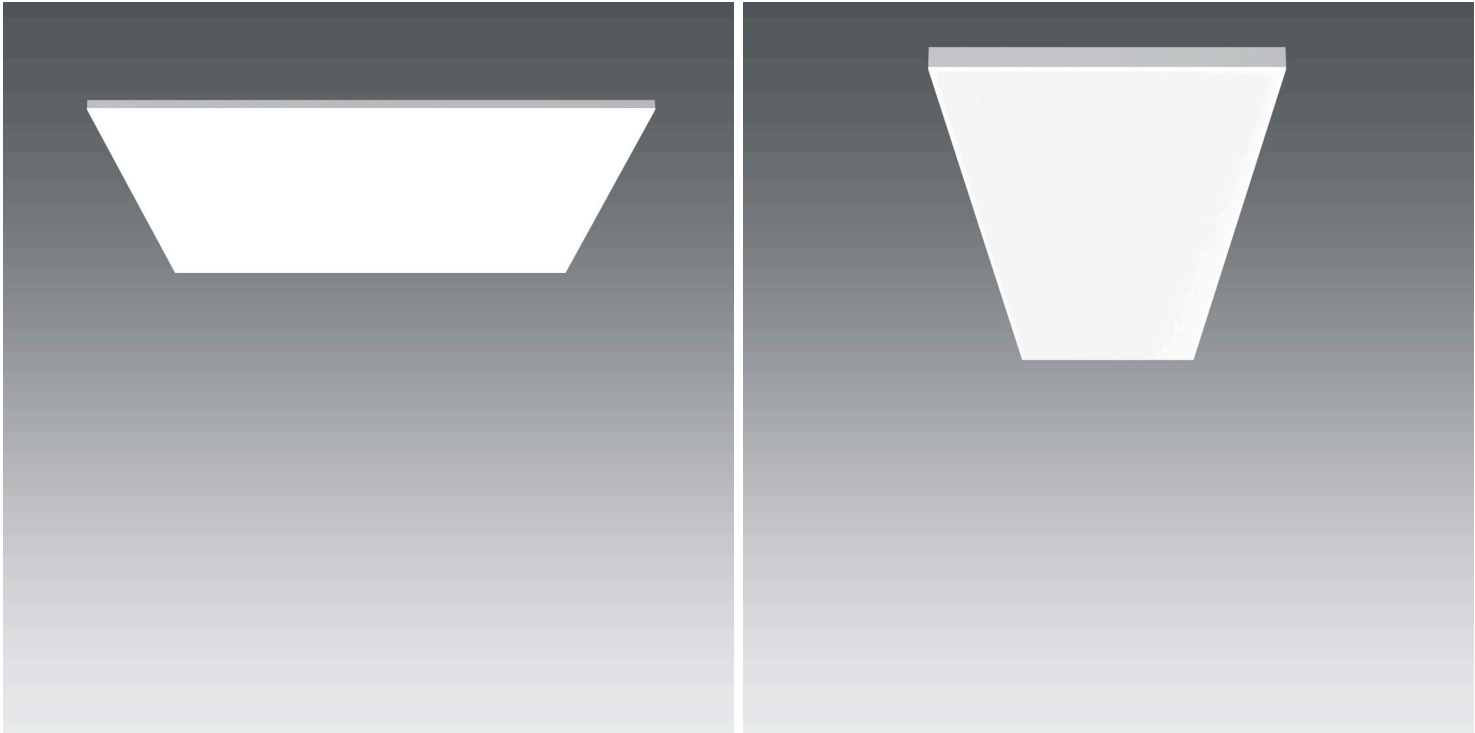

Item NO.	Dimension (MM)	Voltage (V)	Power (W)	Luminous flux of luminaire(LM)	CCT3 (K)	CRI	DF	Warranty (Years)	IP	Certificate	Feame Color	OPTIONS
GW-CLE1-018-G1-Y	300*300*80	220-240	18	1800	4000	>80	>0.7	5	40	CE/ROHS/ERP	White	Dual Power/CCT3
GW-CLE1-024-G1-Y	300*600*80	220-240	24	2400	4000	>80	>0.9	5	40	CE/ROHS/ERP	White	Dual Power/CCT3
GW-CLDY1-040-G1-Y	600*600*80	220-240	40	4000	4000	>80	>0.9	5	40	CE/ROHS/ERP	White	Dual Power/CCT3

MOUNTING PROCEDURE

1

Fix light bracket with screw and plastic anchor into the ceiling,make sure the bracket is firmly installed

2

Connect the L、N、E wires to the terminal

3

The bottom of lamp is pushed flat against the iron plate