



FLORA CEILING LIGHT

FEATURES

- Full hood design
- Ultra-thin frameless design, achieve super-large luminous surface, edge right angle design, Ultra-small R angle design.
- The chassis is made of Iron, the diffuser is made of PMMA.
- Realize quick connection and quick installation.

SPECIFICATIONS

Luminaire for mounting on walls and ceiling, and for pendant mounting

Diameter diffuser: Ø300*60mm; Ø400*60mm; Ø500*60mm

Colour temperature can be adjustable

TECHNICAL DATA

System power	18W; 24W; 40W
Luminous flux of luminaire	1440LM; 1920LM; 3200LM
Colour temperature	3000/4000/5000K
Colour Rendering index(CRI)	RA≥80
Ingress protection	IP40


APPLICATION AREAS

Office & Education

classrooms, meeting rooms, offices, cafeterias, foyers and lobbies, corridors, staircases

Retail & Hospitality

hotels, reception areas, circulation zones

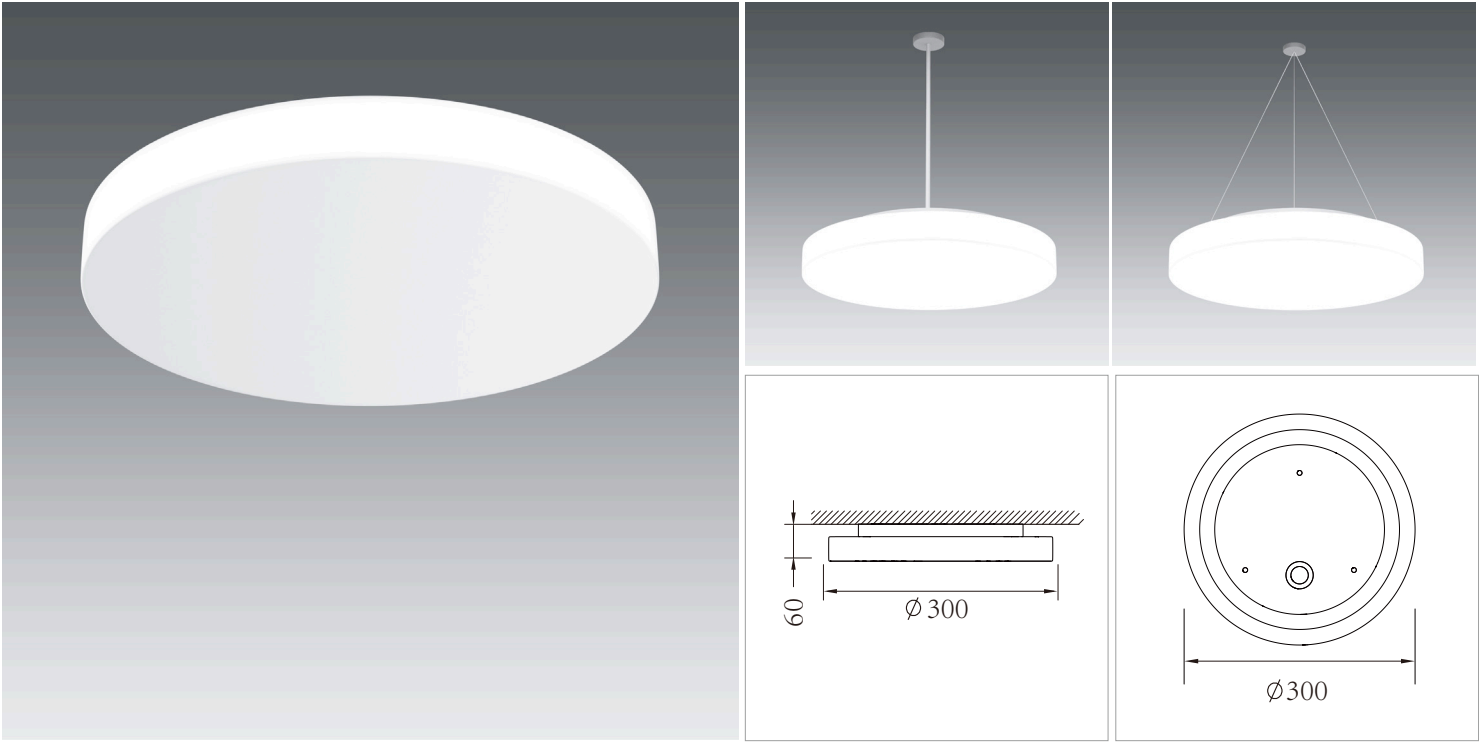

Item NO.	Dimension (MM)	Voltage (V)	Power (W)	Luminous flux of luminaire(LM)	CCT3 (K)	CRI	DF	Warranty (Years)	IP	Certificate	Feame Color	OPTIONS
GW-CLFY1-018-G3-Y	Ø300*60	220-240	18	1440	3000/4000 /5000	>80	>0.7	3	40	CE/ROHS/ERP	White	Three-speed power adjustable/CCT 3
GW-CLFY1-024-G3-Y	Ø400*60	220-240	24	1920	3000/4000 /5000	>80	>0.9	3	40	CE/ROHS/ERP	White	Three-speed power adjustable/CCT 3
GW-CLFY1-040-G3-Y	Ø500*60	220-240	40	3200	3000/4000 /5000	>80	>0.9	3	40	CE/ROHS/ERP	White	Three-speed power adjustable/CCT 3

MOUNTING PROCEDURE

1

Fix light bracket with screw and plastic anchor into the ceiling,make sure the bracket is firmly installed

2

The chassis pivots to the bracket,then fasten it